


AutoLabel™ Thermal Transfer Ribbon

Technical Information

Compliances	REACH / SVHC: 1907/2006/EC
	Food Contact: 1935/2004/EC
	Heavy Metals: 2011/65/EU
	California Proposition 65
	Halogen Restrictions
Storage Conditions	Shelf Life: 12 months guaranteed
	Humidity Rate: 20-80%, 40-95°F (5-35°C)

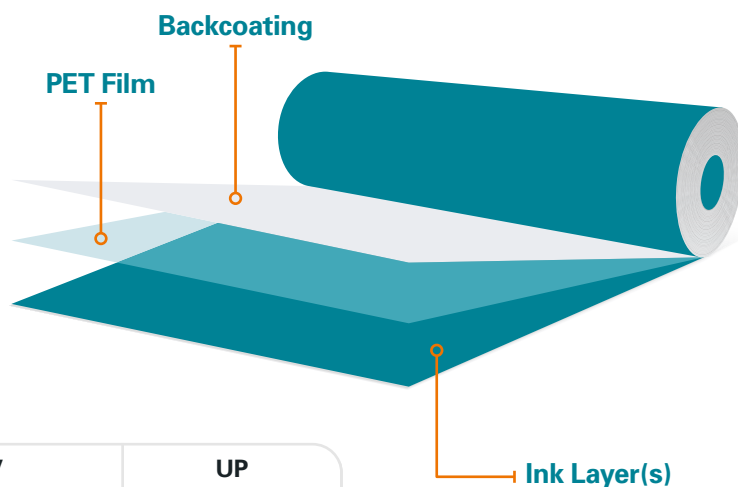

Specifications	UW	UV	UP
Grade of Ribbon	Wax	Resin Enhanced Wax	Wax/Resin
Smudge & Scratch Resistance	3/10	5.5/10	7/10
Heat Resistance	100°F (60°C)	212°F (100°C)	302°F (150°C)
Melting Point	149°F (65°C)	149°F (65°C)	185°F (85°C)
Ribbon Thickness	< 8 µm	< 9 µm	< 9 µm

